





AC 外转子轴流风机 Axial Fans $\Phi 200$




网罩风机G
Grid Fan





S
Airflow
B
Airflow




圆框风机R
Round Frame Fan




S
Airflow
B
Airflow

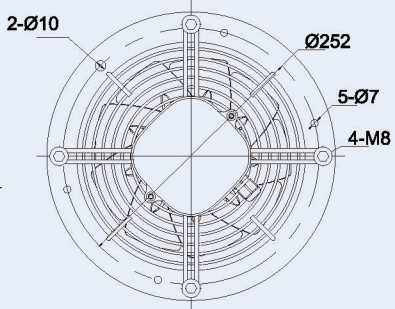


圆筒风机T
Cylinder Fan




S
Airflow
B
Airflow



方框风机B0
Square Frame Fan B0

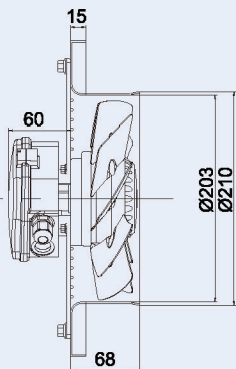



S
Airflow
B
Airflow

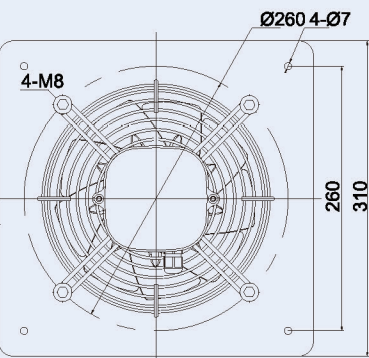

工作方式: S1
绝缘等级: B、F
防护等级: IP44、IP54
环境温度: -30°C ~ 60°C
认证: CCC、CE、UL

Mode of operation: S1
Insulation class: B、F
Type of protection: IP44、IP54
Ambient temperature: -30°C ~ 60°C
Certificates: CCC、CE、UL

风量曲线

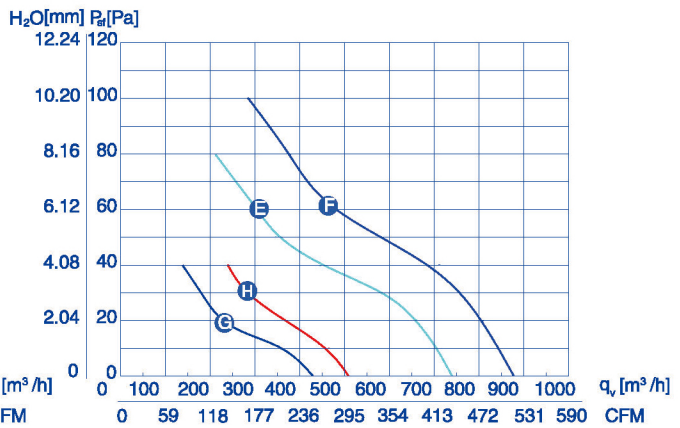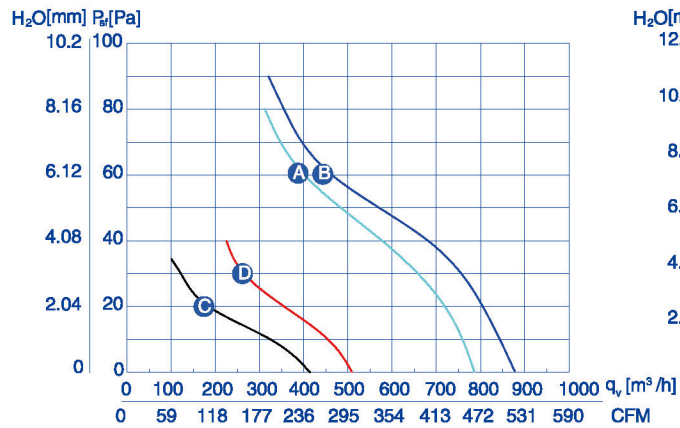

技术参数

型号	额定电压	频率	额定电流	输入功率	额定转速	电容	噪音	叶片数	净重	曲线	备注
TYPE	VOLTAGE	FREQUENCY	CURRENT	INPUT	SPEED	CAPACITANCE	NOISE	BLADE	NET WEIGHT	CURVE NO.	NOTE.
	V	Hz	A	W	r/min	μF	dBA		kg		
YWF2E-200S-92/15	220	50	0.25	55	2500	2	52	9	2.0	A	
		60	0.28	65	2700		54			B	
YWF4E-200S-92/15	220	50	0.21	40	1400	1.5	46	9	2.0	C	
		60	0.20	40	1650		48			D	
YWF2D-200S-92/15	380	50	0.11	55	2300	/	52	9	2.0	E	
		60	0.10	60	2300		52			F	
YWF4D-200S-92/15	380	50	0.10	35	1400	/	46	9	2.0	G	
		60	0.10	30	1650		48			H	